



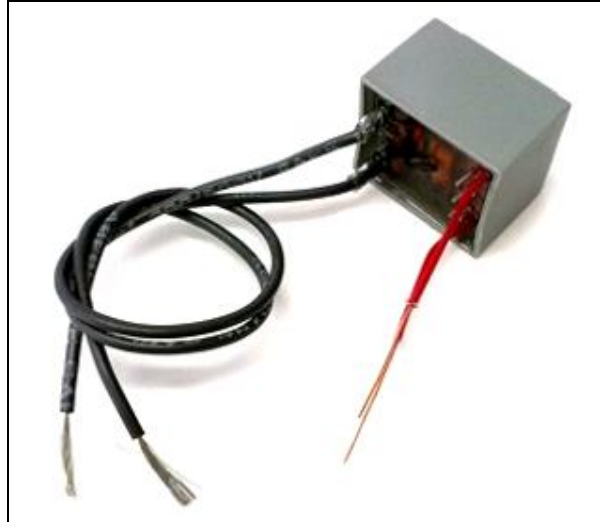

High Voltage Transformer TRF E25V HV

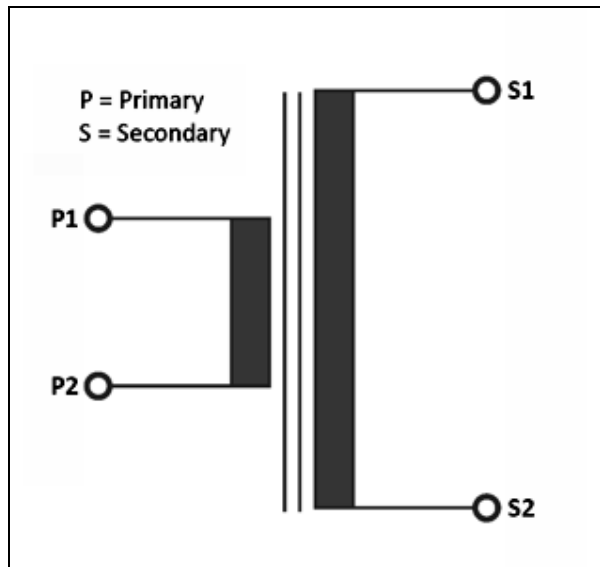

Specifications

- 270 : 1 Turns Ratio
- Primary Winding = 7 Turns of 0.6mm of laminated copper, 13.8 μ H.
- Secondary Winding = 1900 Turns of 0.1mm laminated copper, 881mH.
- 0.3mm Airgap
- E25 Ferrite Powder Core
- Encapsulated

Applications

- Xenon Flash Tube Driver
- Electric Fence Driver
- Solid State Tesla Coil
- Laser Tube Driver