



UL 1015 Hook-up Wire

105 °C 600 V


Applications:

- For Internal wiring of appliances

Product Description:

- Solid or Stranded, tinned or bare copper conductor, 28-10 AWG
- Color-coded PVC insulation
- Rated temperature 105 °C Rated voltage:600 volts.
- Uniform thickness of wire to ensure easy stripping and cutting.
- Resistant to acids, oils, alkalis, moisture and fungus
- Passes UL VW-1& CSA FT1 vertical flame test
- OS- 1 is available

Construction:

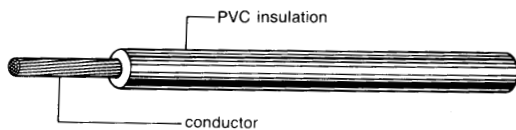

UL Style & CSA Type	Conductor		Insulation Thickness	Overall Diameter	Standard Put-Up		Conductor Resistance at 20°C
	AWG	No./mm			mm	mm	
UL 1015 CSA (TEW) (Stranded)	26	7/0.160	0.79	2.05	2000	610	45.20
	24	11/0.160		2.20	2000	610	29.30
	22	17/0.160		2.40	2000	610	16.70
	20	21/0.180		2.55	2000	610	10.50
	18	34/0.180		2.80	2000	610	6.64
	16	26/0.254		3.10	2000	610	4.18
	14	41/0.254		3.50	2000	610	2.62
	12	65/0.254		3.90	1000	305	1.65
UL 1015 CSA (TEW) (OS-1)	10	105/0.254		5.10	1000	305	1.04
	22	7/0.254		2.38	2000	610	16.70
	20	7/0.320		2.55	2000	610	10.40
UL 1015 CSA (TEW) (Solid)	18	7/0.404		2.80	2000	610	7.06
	26	1/0.404		2.00	2000	610	43.53
	24	1/0.511		2.10	2000	610	27.25
	22	1/0.643		2.25	2000	610	16.50
	20	1/0.813	2.40	2000	610	10.30	
	18	1/1.024	2.65	2000	610	6.52	
	16	1/1.290	2.90	2000	610	4.10	
	14	1/1.630	3.25	2000	610	2.57	
	12	1/2.050	3.65	1000	305	1.62	
	10	1/2.588	4.20	1000	305	1.02	