


RoHS compliant

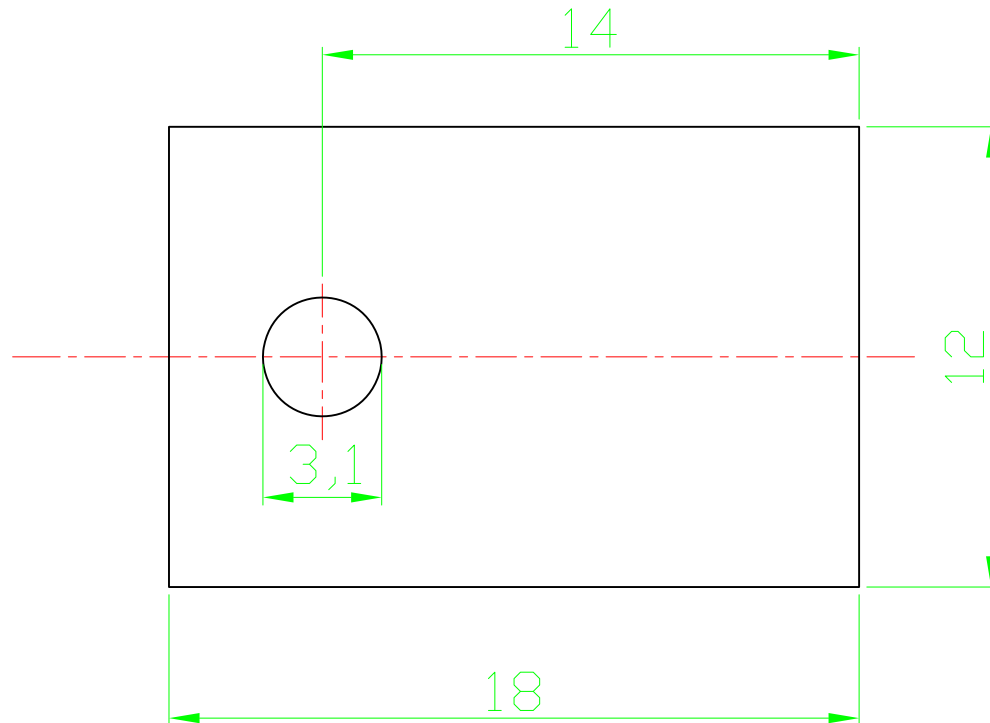

Notes  
 Material thickness :0.05mm  
 Dielectric strength : ca 2 kV  
 Thermal conductivity :R<sub>th</sub> with thermal compound

|           |     |     |                       |            |          |            |             |                 |
|-----------|-----|-----|-----------------------|------------|----------|------------|-------------|-----------------|
| Scale     | 1:1 |     |                       |            |          | Date       | Name        | Customer-No.    |
| TOLERANCE |     |     |                       |            | Drawn    | 20.08.2009 | Dean        |                 |
| X.        | ±X  |     |                       |            | Approved | 10.03.2010 | Andy        | ASSMANN WSW-No. |
| X.X       | ±X  |     |                       |            |          |            |             | V5338           |
| X.XX      | ±X  |     |                       |            |          |            |             | Drawing-No.     |
| DIM       | TOL | ②   | Modify drawing layout | 10.03.2010 | Alex     |            | ASS 0934 HS | rev02           |
| X.°       | ±X° | ①   | Drawn                 | 20.08.2009 | Dean     |            | Replace     | Sheet           |
| X.X°      | ±X° |     |                       |            |          |            |             |                 |
| Angle     | TOL | Id. | Modification          | Date       | Name     |            |             |                 |