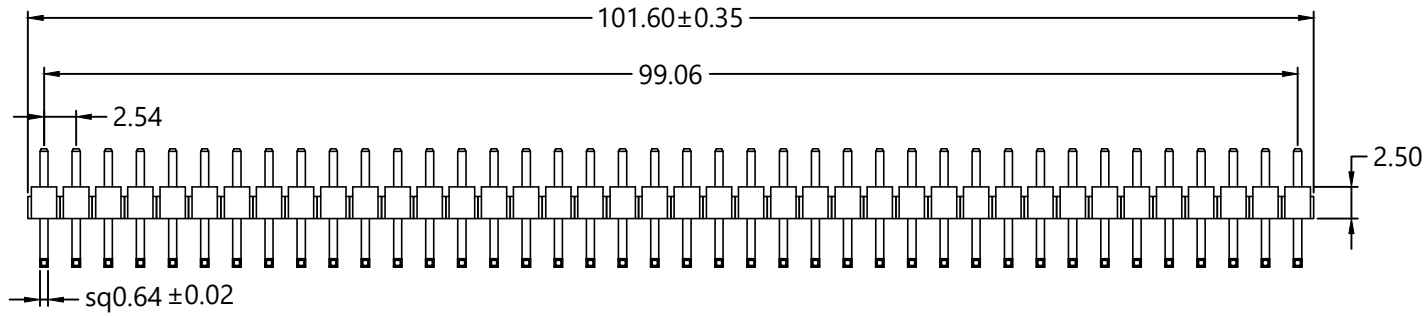
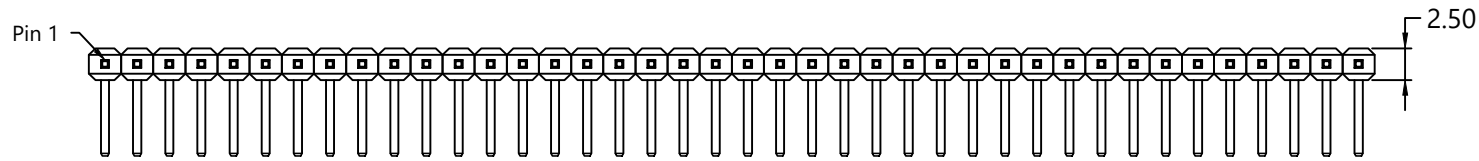


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Polyester,UL 94V-0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C~ to +105°C PBT

			TOLERANCE	  UNITS : mm	DRAWER	 SHALLIN ELECTRONICS CO., LTD.
			.0 = ±0.30		Mandy Lin	
			.00 = ±0.20	SCALE	CHECK	DRAW NO.
			.000 = ±.XXX	NONE		2.54*2.54-YVR40
REV.	DESCRIPTION	DATE	ANG.= ±3°	SIZE	TITLE PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE , SINGLE ROW OPPOSITE INSULATOR	
				A4		