
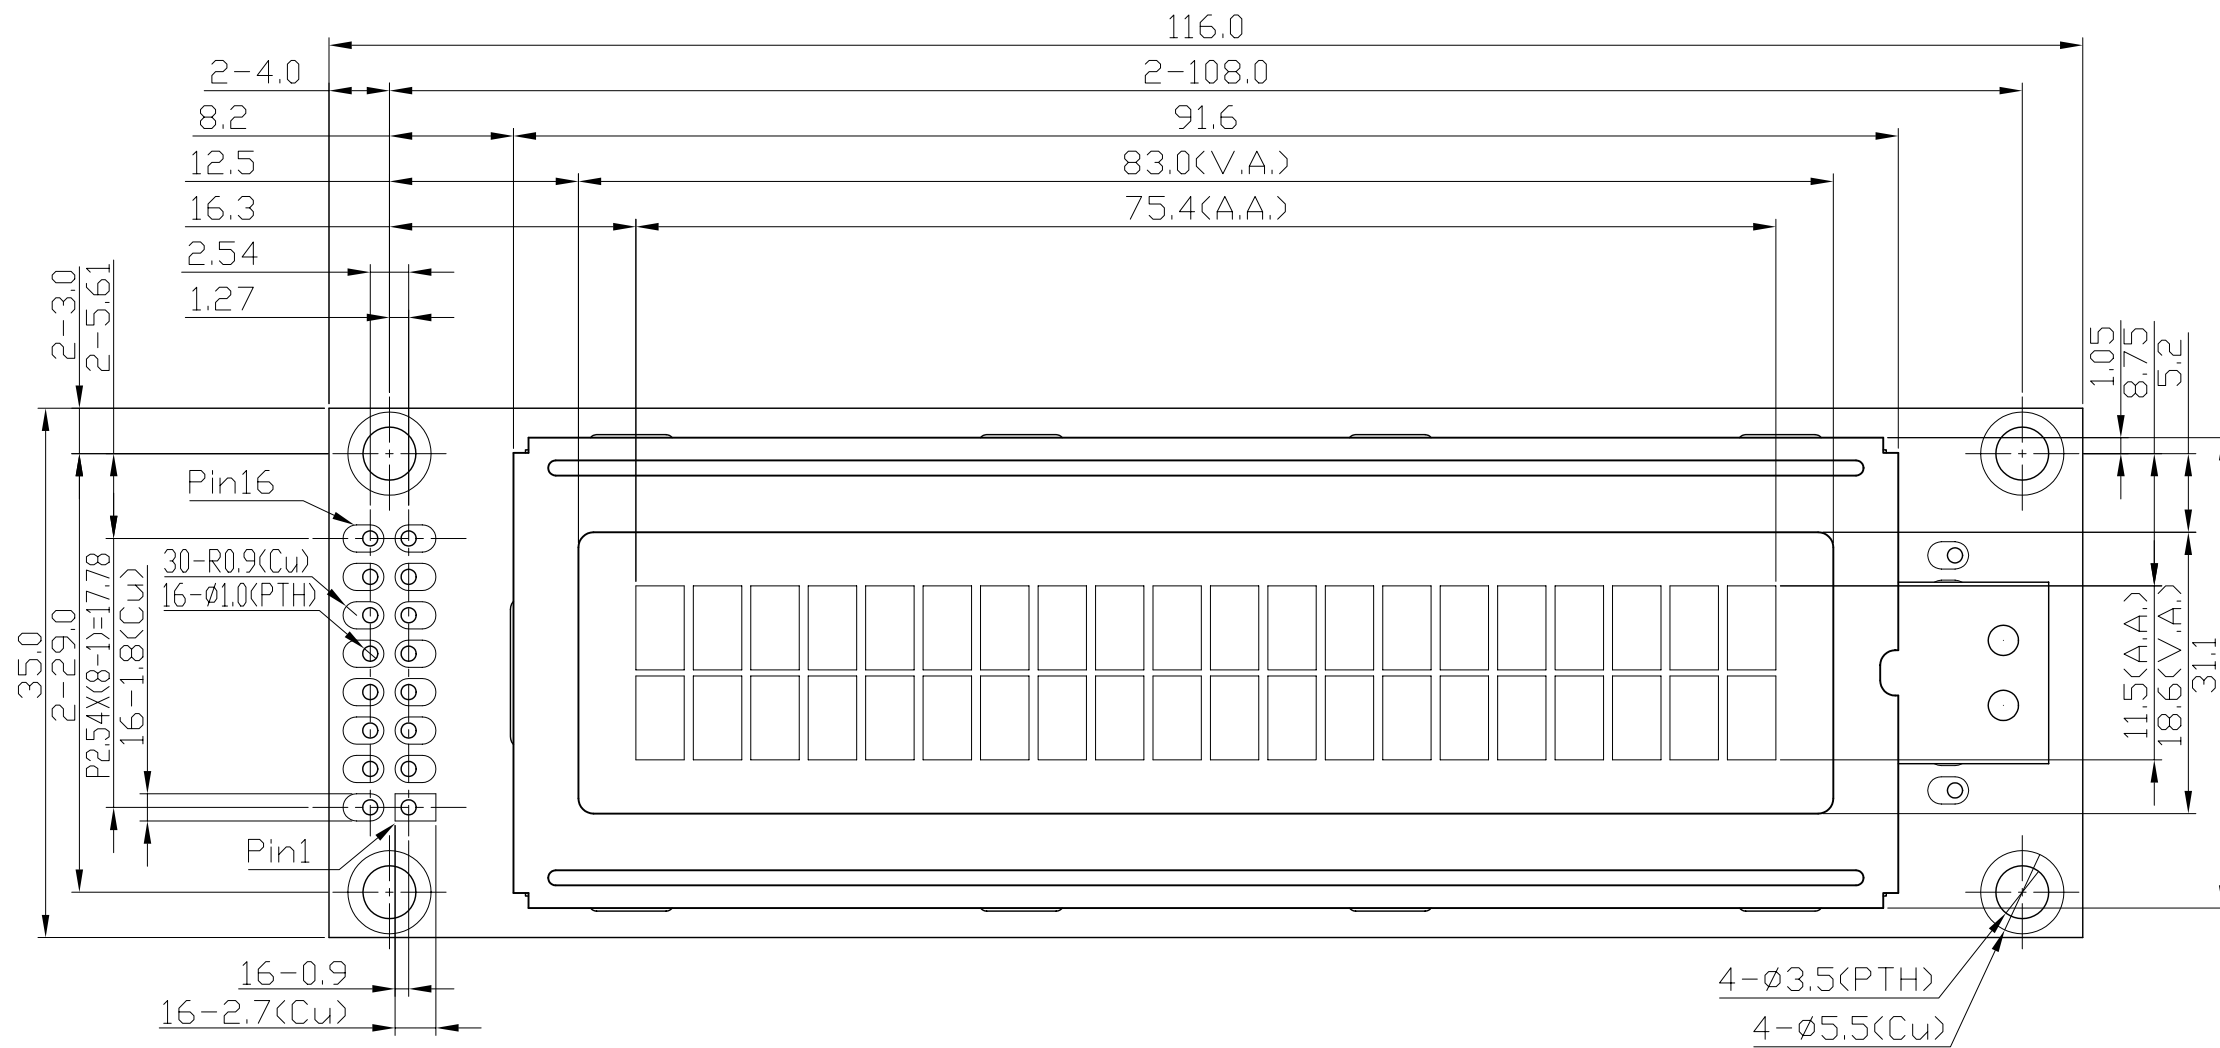
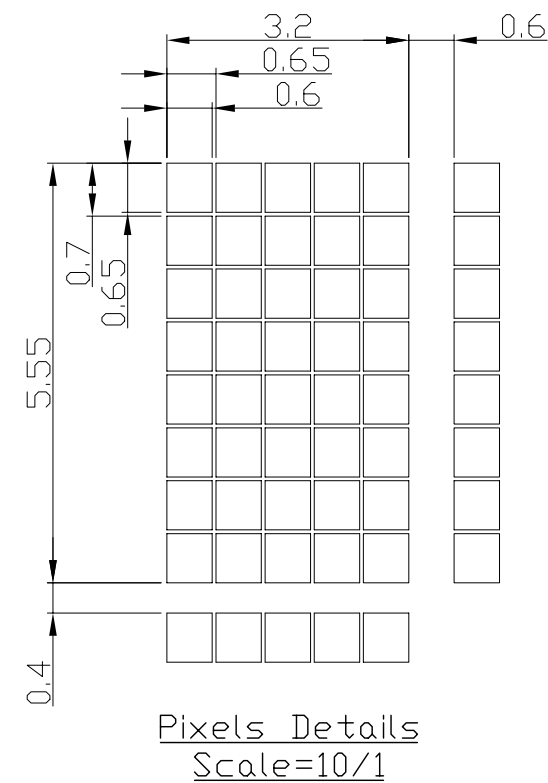
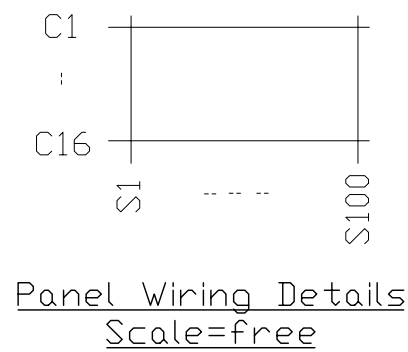


Terminal		
No.	Pin	Name
1		VSS
2		VDD
3		V0
4		RS
5		R/W
6		E
7		DB0
8		DB1
9		DB2
10		DB3
11		DB4
12		DB5
13		DB6
14		DB7
△15		BLK
△16		BLA

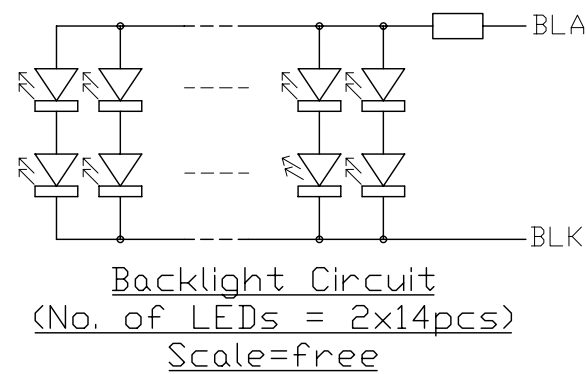

- Note:
- *1. Display Type : STN-YG, Positive, Transmissive
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/16, Bias : 1/5
 - *4. Backlight Color : YG
 - *5. Operating Voltage : 5.0V
 - *6. Operating Temperature : -20°C~70°C
 - *7. Storage Temperature : -30°C~80°C
 - *8. An external VR(5K) must be connected for Contrast Control △
 - *9. Environmental Safe Standard : RoHS △

C		
B	-Add Note	Li Shuai 2006-04-05
A	-Typing Correction	Li Shuai 2005-03-01
Rev	Note	Date
Dwg Title LMB202DBC Outline Dwg		
Dwg No. MK-000802b-1-1		Date 2005-01-31
Scale 2/1	Tol. ±0.5	Unit mm Paper Size A3
Approved	Checked	Drawn Li Shuai

TOPWAY