




SPL (Hong Kong) Limited

Rm 2507, 25/F, Prosperity Centre, 25 Chong Yip St., Kwun Tong, Kln., HK.
Tel: 852-23426867 / 57 Fax: 852-23426847 Email: sales@spl-hk.com.hk
www.buzzer.com.hk ; www.transducer.com.hk ; www.connector.com.hk

Mylar Speaker MSE29 Series

DIMENSIONS

Date : 18 Aug., 2005

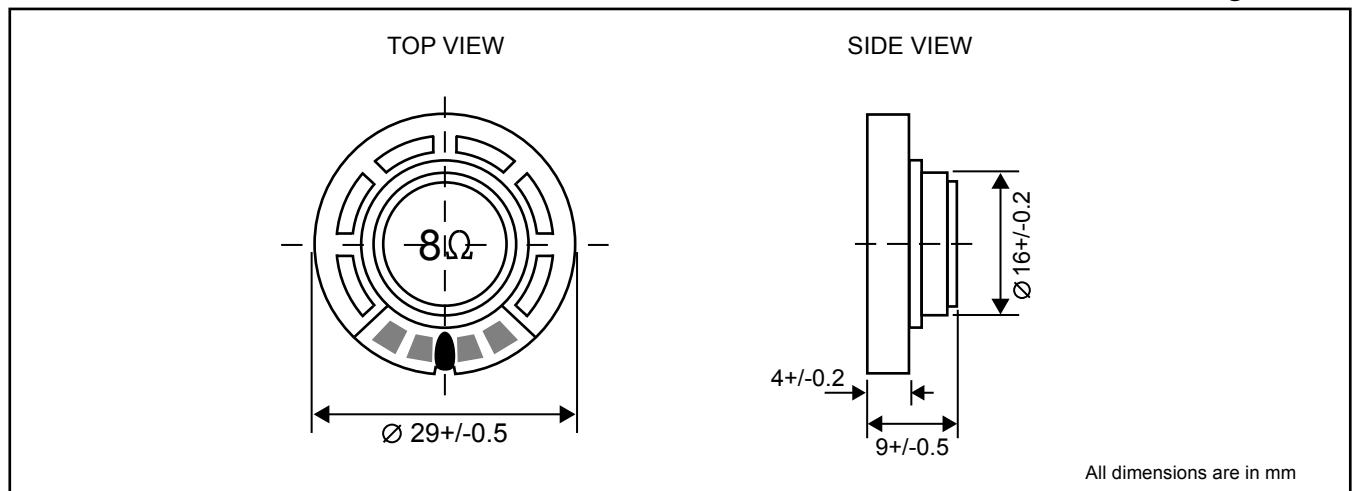

ELECTRICAL SPECIFICATIONS

Model No.	MSE29-01
Diameter	29 +/- 0.5 mm
Height	9.0 +/- 0.5 mm
Back Dia.	16 +/- 0.5 mm
Output S.P.L.	90 +/- 2 dB
Impedance	8 ohm +/- 15% [At 1000 Hz, 1V]
Resonant Freq. [Fo]	600 Hz +/- 20 %
Freq. Response	Fo ~ 5000 Hz
Rated Input Power	0.25 W
Max. Input Power	0.30 W
Buzzer & Rattles	Must Be Normal [Sine Wave 1.41 V]
Load Test	Must Be Normal [White Noise 0.25 W, 8 Hours]
Heat Test	Must Be Normal [55 +/- 2 °C, 20 ~ 25% R.H. 4 Hours]
Cold Test	Must Be Normal [-10 +/- 2 °C, 2 Hours]
Humidity Test	40 +/- 2 °C, 90 ~ 95% R.H. 8 Hours
Case Material	Plastic
Magnet	External Magnet
Operating Temperature	-10 ~ +55 °C
Storage Temperature	-25 ~ + 65 °C