

SPECIFICATION FOR APPROVAL

CUSTOMER

FC235

CUSTOMER P/N

DESCRIPTION/SPEC

PK2W0507-473K-B-T2-LF

EDITION

A

DATE

8/28/13

MADE BY:

CHECKED BY:

APPROVED BY:

CUSTOMER APPROVE

Please fax back after confirm of signature.

東莞青蓮電子科技有限公司

DONGGUAN QINGLIAN ELECTRONICS CO.,LTD

Xinmalian Industrial District,Dalang Town,

Dongguan City,Guangdong Province,China

Tel:86-769-89902295 Fax:86-769-81088160



SPECIFICATION FOR APPROVAL

PK2W0507-473K-B-T2-LF


Rev.No.

A

Page

1

I. CONFIGURATION&DIMENSIONS:

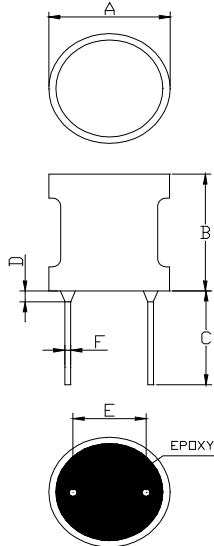

A:6.0MAX mm

B:9.0MAX mm

C:15.0±1.0 mm

D:2.0MAX mm


E:2.5±0.5 mm

F:0.5±0.1 mm

II. ELECTRICAL CHARACTERISTIC:

ITEM	Spec.	Test condition
Ls	47mH±10%	1KHZ 0.3V
DCR	250 Ω MAX	
IDC	LAT=0.02A MAX Ln=Lower L by10%	1KHZ 0.3V
Storage temp range:-40℃----+85℃		
Operating temp range:-40℃----+125℃		
Test condition:20℃		

III. SCHEMATIC

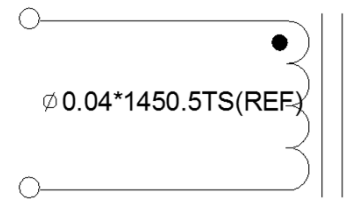

IV. MATERIALS:

NO.	DESCRIPTION	MATERIAL	MANUFACTURER
a.	CORE	JA3 DR2W5*7RB2.2 F4.0 P2.5 TC0.5*17.5*17.5	JIA CI
b.	WIRE	2UEW/F ∅0.04mm	YU LONG
c.	SOLDER	99.3Sn/0.7Cu	QIAN DAO
d.	TUBE	PET-5*8-O-N	TAI DA
e.	FLUX	XD-880	EAST LIGHT
f.	CLEANSER	XD-709A	EAST LIGHT
g.	EPOXY	H210	YE XU