


specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.cm	gcm <sup>2</sup>	Kg
	2	1.8	8.06	0.62	13	40	98	275	0.65


Wiring Diagram:

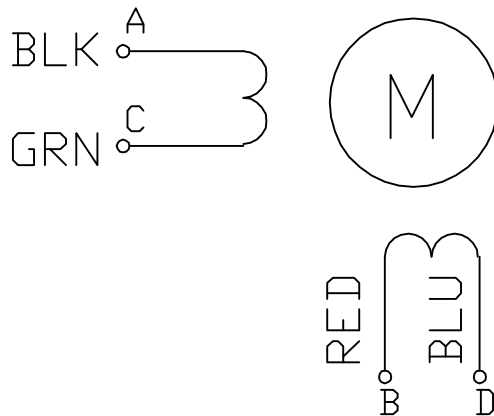

CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

SEE FROM THE SHAFT END

Dimension:

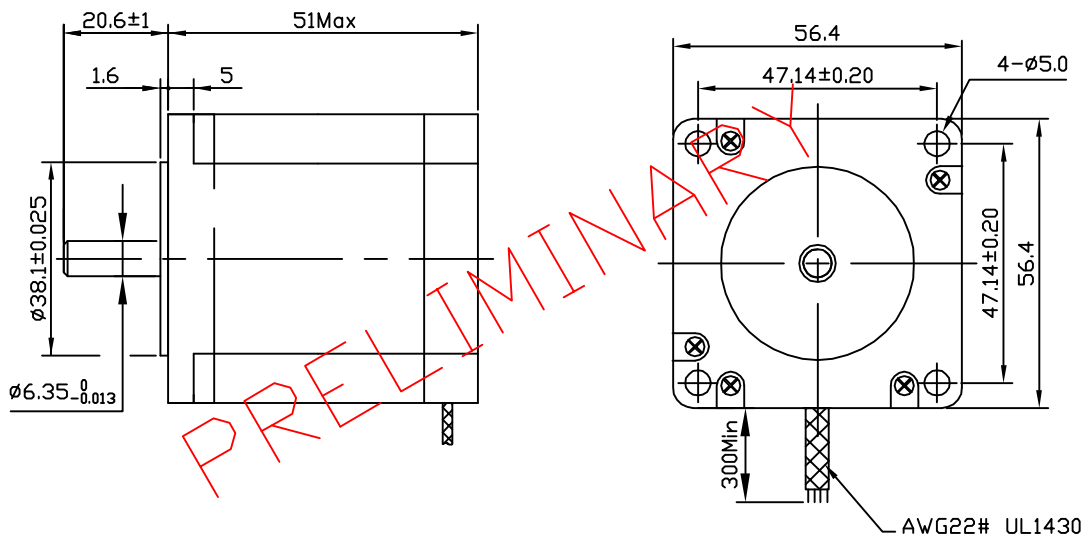

DESIGN	DATE	P/N.
CHECK		TITLE: SPECIFICATION
APPD		USED ON: FL57STH51-0624A
SCALE		DWG NO. FX3.162. JS
SHEET OF		REV
		FULLING MOTOR

REV	ECN NO	DESCRIPTION	DRN	APP'D	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES:			MATERIAL		
DECIMALS:		ANGULAR:	THIRD ANGLE PROJECTION		
.x	±0.5	±0°30'			
.xx	±0.25				
.xxx	±0.1				
UNIT: mm					
DO NOT SCALE DRAWING					