single RS485 isolation transceiver module



FEATURES

- Two-terminal isolation (input and output are mutually isolated)
- Integrated Isolated DC/DC converter
- Bus protection
- Isolation voltage :2.5KVDC
- Operating temperature range:-40℃~+85℃
- Baud rate 9600bps
- Connect up to 32 nodes on one bus

TD301D485/TD501D485 series are transceiver isolation module with integrated duplex power isolation, electrical isolation, and RS485 interface bus protector; Products can be easily embedded in the user equipment, achieve function of RS485 network connection. The isolation RS485 circuits of using a piece of power isolation module, three light couplings and RS485 transceivers and device are only need to adopt a RS485 isolation module now. Simplify the customers on the isolation requirements of the design.

Selection Guide			
Part No.	Power Supply input (VDC)		
TD301D485	3.17~3.45		
TD501D485	4.75~5.25		

Input Sp	Input Specifications				
Item		Operating Conditions	Value		
Input Power Static current		Products energized, no communication	TD501D485≤30 mA,TD301D485≤40mA		
Supply Send current		9600bps Square wave communication	TD501D485≤40 mA,TD301D485≤60mA		
	0-4-1-4-4		TD301D485 compatible with + 3.3 V UART interface		
Input	Serial interface		TD501D485 compatible with + 5 V UART interface		
Pin current			I _{TXD} ≤5mA;I _{RXD} ≤3 mA;I _{CON} ≤5mA		

Bus Inter	face		
Item		Operating Conditions	Value
Output RS485 bus interface			Standard interface RS485 ,pull-up and pull-down resistor, whose value is 4.7K have been set to A/B line.

Transmis	sion Specificat	ions					
Item		Operating Conditions	Value				
Data Rate			9600bps (max.)			
Transceiver S	Switching Delay			The delay time from the receiving data switch to the sedata: 30 µs(min.), 100 µs(max.).		to the send	
The Number	r of Nodes		Connect up to	32 nodes or	n one bus		
Transceiver	Control		Contrary to co	mmon RS485	5 transceiver control level		əl
			Control	Input	Output		
			CON	TXD	Α	В	Line state
	Sending Status		0	1	1	0	Normal
To the Talaka			0	0	0	1	Normal
Truth Table		Control	Input		Output	'	
	Receiving Status		CON	A-B	RXD		
			1	≥0.2V		1	
			1	≤-0.2V		0	

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.



General Specifications				
Item	Operating Conditions	Value		
Electric Isolation		Two-terminal isolation (input and output are mutually isolated)		
Degree of Isolation	testing for 1 minute, leakage current <5mA, humidity <95%	2.5KVDC		
Operating Temperature		-40°C~+85°C		
Transportation and Storage Temperature		-50℃~+105℃		
Operating Humidity		10%~90%		
Temperature rising	Ta=25°C	25°C (Typ.)		
Application Environment		The presence of dust, fierce vibration, impulsion and corrosive gas may cause damage to the product		

Physical Specifications	
Casing Material	Black flame-retardant heat-proof plastic (UL94-V0)
Package	DIP10
Weight	About 10g
Cooling Method	Free air convection

EMC	C Specifications				
EMI	Conducted Disturbance	CISPR22/EN55022	CLASS A (see 2-2) for recommended circuit)		
EIVII	Radiated Emission	CISPR22/EN55022	CLASS A (see 2-2) for recommended circuit)		
	Electrostatic Discharge	IEC/EN61000-4-2	Contact ±4KV		perf. Criteria B
	ГСТ	IEC/EN61000-4-4	Power supply port ±2KV	(see 2-1) for recommended circuit)	perf. Criteria B
	EFT	IEC/EN61000-4-4	Signal port ±1KV	(see 2-3) for recommended circuit)	perf. Criteria B
	EMS Surge Immunity	IEC/EN61000-4-5	Power supply port ±1KV	(see 2-1) for recommended circuit)	perf. Criteria B
EMS			Signal port ±0.25KV/±0.5KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Signal port ±0.5KV/±1KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Signal port ±1KV/±2KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Signal port ±2KV/±4KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Signal port ±4KV/±6KV	(see 2-3) for recommended circuit)	perf. Criteria B

Application Precautions

- 1. Please read the technical manual carefully before use; contact our technical support if you have any problem.
- 2. Do not use the product in hazardous areas.
- 3. Use DC power supply for the product and 220V AC power supply is prohibited.
- 4. Do not dismount and assemble the product without permission to avoid failure or malfunction of equipment.

After-sales service


- 1. Ex-factory inspection and quality control have been strictly conducted for the product; if there occurs abnormal operation or possibility of failure of internal module, please contact the local representative or our technical support.
- 2. The warranty period for the product is 3 years as calculated from the date of delivery. If any quality problem occurs under normal use within the warranty period, the product can be repaired or changed for free.

Applied circuit


See Application Notes for Isolated Transmitter for details.

Design Reference

1. Typical application

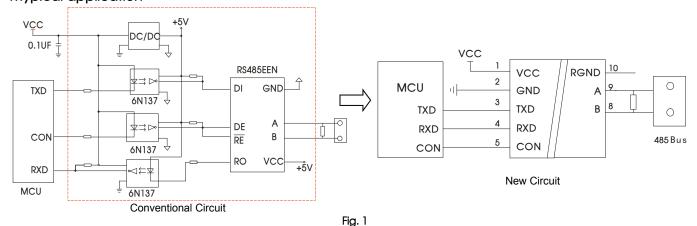

2.Recommended EMC circuit

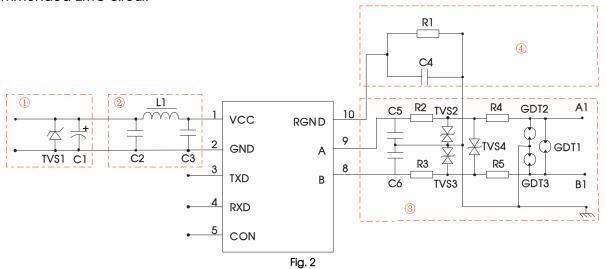

Recommended external circuit parameters:

Model	TD301D485/TD501D485					
Model	±0.25KV/±0.5KV	±0.5KV/±1KV	±1KV/±2KV	±2KV/±4KV	±4KV/±6KV	
C1	220uF/10V(Electro	olytic capacitor)	220uF/10V(Electrolytic capacitor)			
TVS1		SMCJ5.0A (TD3	01D485) / SMCJ	D485) / SMCJ6.5A(TD501D485)		
C2/C3	1uF/	50V		1uF/50V		
L1	10	μH	10µH			
C5/C6	100pF	100pF/100V		100pF/100V		
C4	1nF/2KV		1nF/2KV			
R1	1ΜΩ		1ΜΩ			
TVS2/TVS3/TVS4	S2/TVS3/TVS4 SMBJ15CA SMBJ15CA					
R4/R5		-	10Ω/2W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor	
R2/R3	10Ω/1W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor)			-	
GDT1/GDT2/GDT3			G30-A90X	S30-A90X	S50-A90X	

Notes:


- (1) GDT1, GDT2 and GDT3 be used instead of a three terminal gas discharge tube. Such as GDT1, GDT2 and GDT3 three two-terminal device available gas discharge tube instead of a three-terminal at "± 4KV / ± 6KV" hierarchy, as B3D090L-C.
- 2 It is not needed the component when parameter with the symbol of "--".


3. For more information please find the application notes on www.mornsun-power.com

MORNSUN®


MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

Dimensions and Recommended Layout

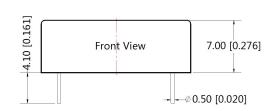

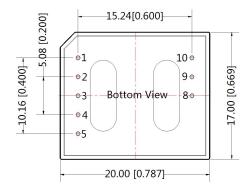

Note: Unit:mm[inch] Pin diameter tolerances:±0.10[±0.004] General tolerances:±0.25[±0.010]

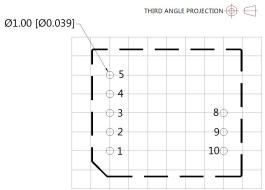

Note: Grid 2.54*2.54mm

	Pin-Out			
Pin	Designation	Function		
1	VCC	Input Power		
2	GND	GND		
3	TXD	TD_D485 Send Pin		
4	RXD	TD_D485 Receiving Pin		
5	CON	Send&Receiving Control Pin		
8	В	BPin		
9	Α	APin		
10	RGND	Isolation Power Output RGND		

Notes:

- 1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58040012;
- 2. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load;
- 3. All index testing methods in this datasheet are based on our Company's corporate standards;
- 4. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
- 5. We can provide product customization service;
- 6. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.