

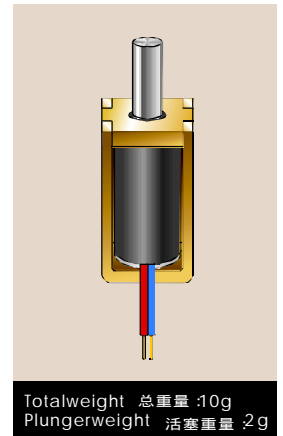


OPEN FRAME SOLENOID SDO-0420L

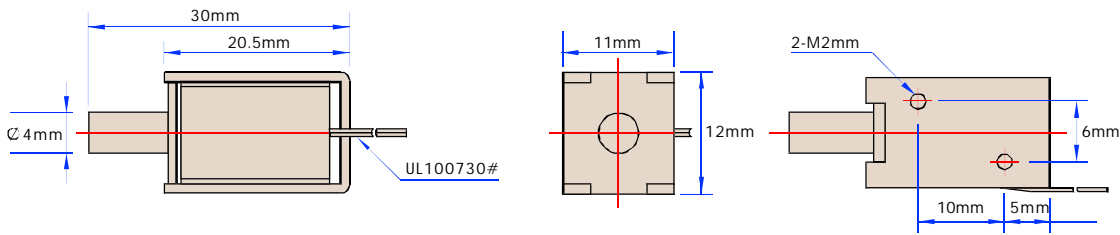

ORDERING INFORMATION 代号编排

ZANTY 宗泰 — SD O-04 20 L- * * *
 Open Frame Solenoid 开置式螺线管
 Plunger dia(mm) 滑杆直径(mm) —
 Frame length(mm) 框架长度(mm) —
 Coil Resistance 线圈电阻 : * Ω
 Serial Number 序号
 Voltage 电压 :06:DC6V 12:DC12V 24:DC24V 48:DC48V
 L: Pull Type 吸入式 S: Push Type 推出式

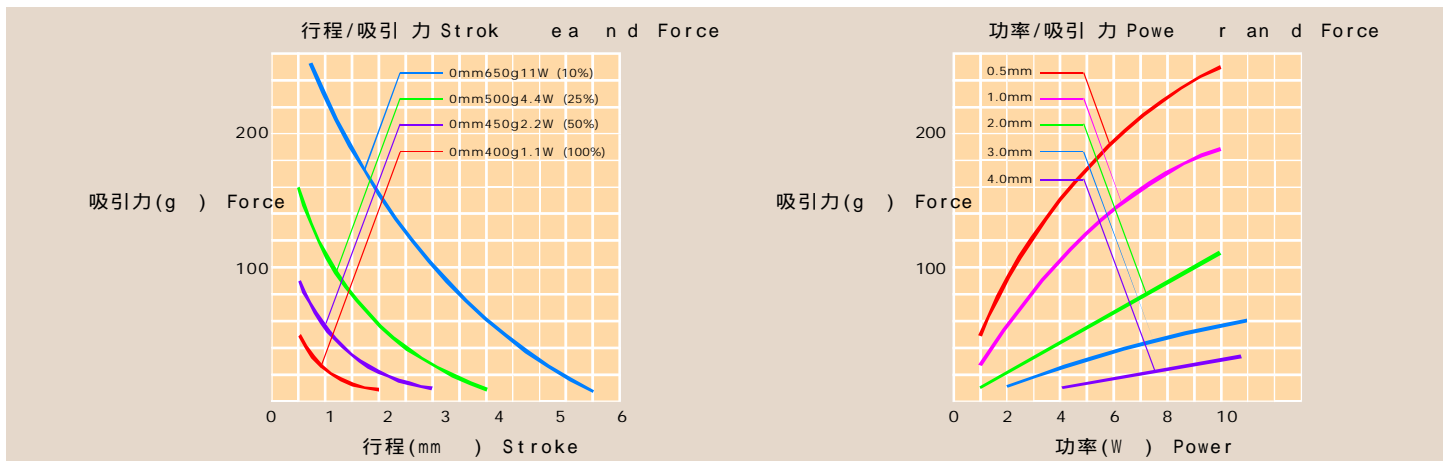

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time / "ON" time + "OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	50	18	2
20°C 时的功率 watt at 20°C		1.1	2.2	4.4	11
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-0420L-06A	30	6	8.5	12	19
SDO-0420L-12A	120	12	17	24	38
SDO-0420L-24A	480	24	33.9	48	75.9
SDO-0420L-48A	1920	48	67.9	96	151.8



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China P.C.: 518112

Tel.: (+86 755) 2854 3752

Fax: (+86 755) 2854-3458

E-mail: Sales@Zanty.com

Website: www.zanty.com