


**QUICK  
& EASY**  
TO CONNECT

STRIP. CLICK. CONNECT

# CONNECTORS

## WATERPROOF CONJOINT 3 WAY

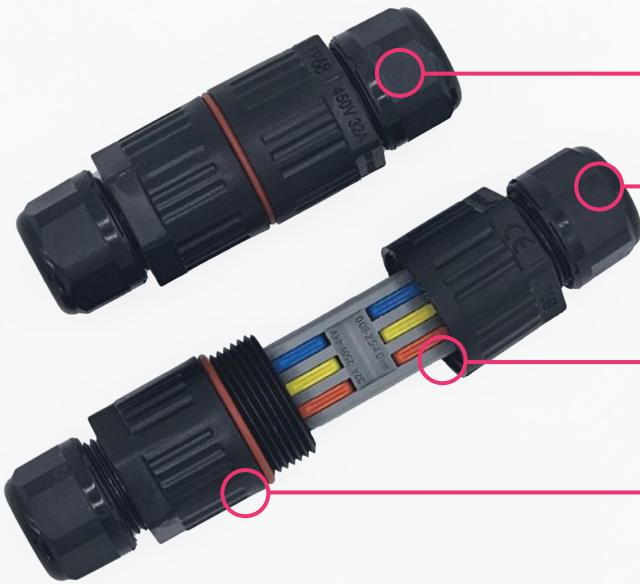


IP68 Waterproof connector  
3 way

No screwdriver needed to  
connect your wires.

The orange, yellow and blue  
levers act as clamp to keep  
wires in firmly locked in place  
for dependable connections.

Ideal for exterior light fittings  
and circuits, as well as areas  
exposed to moisture or  
water.

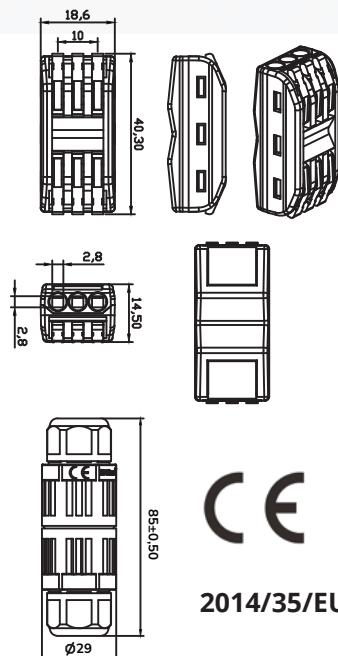

### Technical Data

Product code:	401040
Description:	CPF 200 Waterproof connector 3 way
Rated voltage:	400 V
Rated current:	32A
Main wiring:	From 12AWG down to 28 AWG
Rated Temperature:	85 °C
Material:	Nylon plastic, copper and 304 stainless steel

### For use of

Solid wire:	0.08 mm <sup>2</sup> – 4.0 mm <sup>2</sup>
Stranded wire:	0.08 mm – 2.5 mm <sup>2</sup>
Strip Length:	9 – 10 mm

### Instructions

1. Strip wire to 9 -10 mm.
2. Unscrew the outer casing and loosen the cable nuts.
3. Insert wire to connect.
4. Move lever to the open position (in 90° angle).
5. Push in wire and move lever back into closed position.
6. Screw the outer casing tightly to create a watertight seal
7. Tighten the cable nuts to secure the wire connections.