


HUALI BATTERY CO.LTD

60K3A3H Ni-Cd BUTTON CELL


TECHNICAL DATA

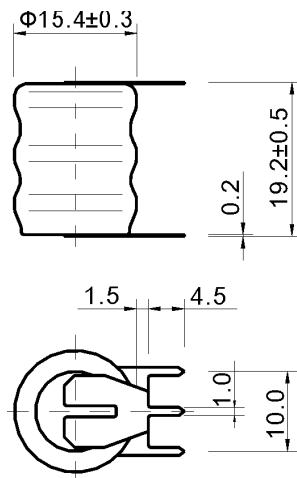


Model	Voltage	Capacity	Recommended Trickle Charge Current	Nominal Charge Current	Normal Charging Time	Nominal Discharge Current	Weight
60K3A3H	3.6V	60mAh	1.8~3mA	6mA	14~16h	12mA	10.1g

TECHNICAL CHARACTERISTICS


TYPICAL CHARGE CURVE (6mA)

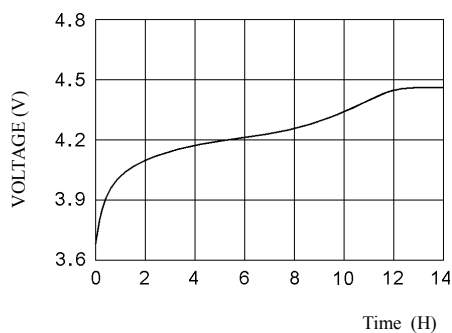


TYPICAL DISCHARGE CURVE (12mA)

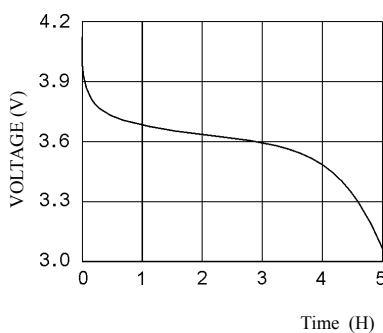


CYCLE LIFE CURVE

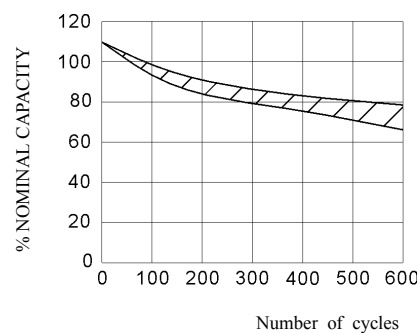


TYPICAL CHARGE CURVE AT VARIOUS CURRENTS

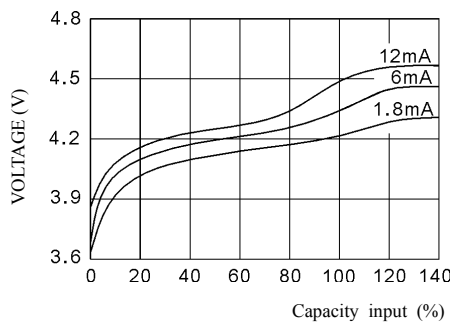

DISCHARGE CURVE AT VARIOUS TEMPERATURES (12mA)

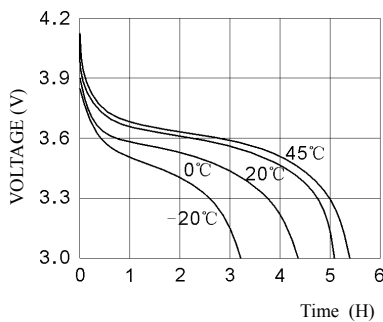

SELF DISCHARGE RATE AT VARIOUS TEMPERATURES

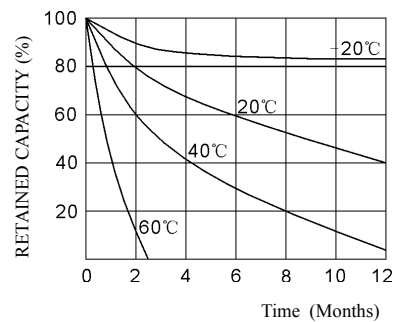

TECHNICAL INFORMATION

1. APPLICATION

This specification applies to the Ni-Cd batteries

Model : 60K3A3H

2. CELL AND TYPE

2.1 Cell : Sealed Ni-Cd Button Cell

2.2 Type : Button type

2.3 Size type : 3.6V

3. RATINGS

3.1 Nominal voltage : 3.6V

3.2 Nominal capacity : 60mAh

3.3 Typical weight : 10.1g

3.4 Standard charge : 6mA×14hours

3.5 Rapid charge : 12mA×6hours
Trickle current : 1.8mA

3.6 Discharge cut-off voltage: 3.0V

3.7 Temperature range for operation (Humidity: Max.85%)

Standard charge 0 ~ +45°C

Rapid charge +10 ~ +45°C

Trickle charge 0 ~ +45°C

3.8 Discharge -10 ~ +45°C
Temperature range for storage (Humidity: Max.85%)

Within 2 years -20 ~ +35°C

Within 6 months -20 ~ +45°C

Within a month -20 ~ +45°C

Within a week -20 ~ +55°C

4. ASSEMBLY & DIMENSIONS

Per attached drawing

5. PERFORMANCE

5.1 TEST CONDITIONS

The test is carried out with new batteries (within a month after delivery)
ambient conditions

Temperature: +25 ± 5°C

Humidity: 60 ± 20%
Note 1

Standard charge : 6mA×14hours
Standard discharge : 12mA to 3.0V

5.2 TEST METHOD & PERFORMANCE

Test	Unit	Specification	Conditions	Remarks
Capacity	mAh	≥60	Standard Charge/discharge	Up to 3 cycles Are allowed
Open Circuit Voltage (OCV)	Voltage (V)	≥3.9	After 1 hour standard Charge	
Internal Impedance	mΩ/cell	≤1000	Upon fully charge (1KHz)	
High rate Discharge (30 mA)	Minute	≥60	Standard charge Before discharge	
Discharge Current	mA	30	Maximum continuous Discharge current	
Over charge		No leakage Not explosion	1.8mA charge one year	
Charge Retention	mAh	48	Standard charge; Storage: 28 days; Standard discharge	
Cycle Life	Cycle	≥400	IEC509-1988 4.4	
Leakage		No leakage nor Deformation	Fully charge at 6mA, Stand 14 days	

Note 2 IEC509-1988 4.4 cycle life

Cycle number	Charge	Stand in charged Condition	Discharge
1	6mA for 16h	5h	12mA for 3h
2-48	6mA for 8h	1h	12mA for 3h
49	6mA for 8h	1h	12mA to 1.0V/cell
50	6mA for 16h	1h	12mA to 1.0V/cell

1. Before the endurance in cycles test, the cell shall be discharged at 12mA to a final voltage of 1.0V/cell.

2. The following endurance test shall then be carried out, in an ambient temperature of 20°C±5°C.

5.3 Humidity

The battery shall not leak during the 14 days which it is submitted to the condition

of a temperature of 33±3°C and a relative humidity of 80±5%

6. OTHERS

6.1 We recommend you to set the cut-off voltage at 1.0V/cell

6.2 If the cut-off voltage is above 1.1V/cell, the battery may be underutilized resulting insufficient use of the available capacity

6.3 If it is below 1.0V/cell, the battery may have discharge or reverse charge to the cell

7. PRECAUTION

The cells shall be delivered in charged condition. Before testing or using, the cell shall be

7.1 discharged at 20±5°C at a constant current of 12mA to a final voltage of 1.0V/cell. Avoid throwing cells into a fire or attempting to disassemble them.

7.2 Avoid short circuiting the cells.

7.3 Avoid direct solidarity to cells.

7.4 Observe correct polarity when connecting.

7.5 Do not charge with more than our specified current.

7.6 Use cells only within the specified working temperature range.

7.7 Store cells in dry and cool place.